

FloorTac™

with Interlam™ Pro Emerytex®

FloorTac™ with Interlam™ Pro Emerytex® is designed for attention-grabbing floor graphics that instantly take floors from drab to fab. Its removable, non-damaging adhesive makes this paired solution ideal for short-term indoor advertising where graphics are applied to the floor. When combined with Drytac's Interlam™ Pro Emerytex® laminating films, FloorTac™ provides a certified slip-resistant finish for the ultimate floor graphic solution.

CAN BE APPLIED TO:

- CERAMIC TILES
- SEALED WOOD
- CONCRETE
- WAXED VINYL
- MARBLE
- TERRAZZO
- SHORT-PILE CARPET**

7.2

mil
(Total Solution)

Interlam Pro Emerytex
Matte Pebble PVC Film

FloorTac
Matte White PVC Film



FloorTac
(Eco) Solvent
Latex
UV



Interlam Pro Emerytex
Pressure Sensitive Acrylic
Adhesive

FloorTac
Removable Gray Acrylic
Adhesive



Widths up to 54in




INTERIOR*

ENGINEERED WITH NO-LIFT TECHNOLOGY



APPLICATIONS

- SCHOOLS
- HOSPITALS
- RETAIL ADVERTISING
- SUPERMARKETS
- RESTAURANTS

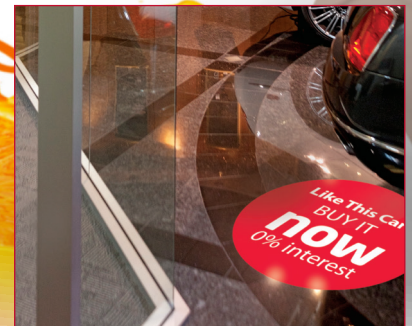

DRYTAC®

ADHESIVE SCIENCE

www.drytac.com

FloorTac™

with Interlam™ Pro Emerytex®

FloorTac™ is a 3.2 mil (80µ) printable matte white polymeric PVC film with a removable, pressure sensitive gray acrylic adhesive protected by a poly coated Kraft release liner.

Interlam™ Pro Emerytex® is a 4 mil (100µ) monomeric soft calendared PVC laminating film with a matte pebble textured finish, coated on one side with a pressure sensitive acrylic adhesive that is protected by a bleached Kraft release paper coated on both sides with PE and siliconized on the release side.

- THE PAIRED SOLUTIONS CARRIES SEVERAL SLIP RATINGS & CERTIFICATIONS
- FOR BEST RESULTS, LEAVE A 0.25" (6MM) NON-PRINTED BORDER AROUND THE EDGE OF THE IMAGE.

* Up to 9 months indoor durability dependent upon floor-traffic and correct installation.

**The carpet installation surface must be short pile or tightly woven, minimal texture with a limited cushion. The carpet should be clean and dry prior to application. Due to the huge variance of carpet surfaces, materials and types along with pre and post chemical treatments, a test sample is mandatory prior to production and installation. It is important that all printer and ink manufacturer guidelines are followed. The Drytac limited warranty only covers for material defect, no returns or consequential losses will be accepted.

For more information, performance and warranty guidelines please contact your local Drytac office.

© 2020 Drytac Corporation. E&OE.
All other trademarks are the property of their respective owners.

TECHNICAL SPECIFICATION

FloorTac™ PRODUCT STRUCTURE

Film	Matte White Polymeric PVC
Adhesive	Removable Gray Acrylic (Pressure Sensitive)
Release Liner	90# Poly Coated Kraft

FloorTac™ PRODUCT CHARACTERISTIC

Film Thickness	3.2 mil (80µ) 4.2 mil
Adhesive Layer	1 mil (25µ) (105µ)
Fire Ratings	Class A or 0 (ASTM E-84) PASS (CAN/ULC-S102)
Application Temperature	>-4°F (-20°C)
Service Temperature Range	-22°F to 302°F (-30°C to 150°C)

Interlam™ Pro Emerytex® PRODUCT STRUCTURE

Film	Matte Pebble Textured Monomeric PVC
Adhesive	Acrylic (Pressure Sensitive)
Release Liner	2 Side PE Coated, 1 Side Siliconised Kraft

Interlam™ Pro Emerytex® PRODUCT CHARACTERISTICS

Film Thickness	4 mil (100µ) 5 mil
Adhesive Layer	1 mil (25µ) (125µ)
Fire Ratings	Class 0 (BS 476 Part 6 and 7) Class 1 or A (ASTM E-84)
FDA Certification	PASS (FDA 21 CFR 177.1975)
Slip Certifications	• Low Slip Potential; Wet: 36 (EN 13036-4/ASTM E3030) • R 11 (DIN 51130:2010) • Dry: 62; Wet: 35 (HB198:2014 (AS/NZS 4586)) • Acceptable (ANSI B101.3)
Application Temperature	>-4°F (-20°C)
Service Temperature Range	-49°F to 230°F (-45°C to 110°C)

Shelf Life	2 years
Storage Conditions	59°F to 72°F (15°C to 22°C); 50 - 55% Relative Humidity

DRYTAC®
ADHESIVE SCIENCE

www.drytac.com